CAS2042

IP Share+ Fast EtherSwitch for Cable/xDSL Modem

Connect Internet and your Office/Home network

Sharing for Hi-speed Surfing
No need to apply for additional IP address or account, multi-users canshare just one this device, single IP address, and one Cable/xDSL Modemfor Internet surfing concurrently.

Plug & Play
Both DHCP client and server can complete the network configuration forthe device self and all computers on local network automatically. Zero configuration effort is needed for users.Especially the 4 port EtherSwitch design, users can just plug the cable into the device without buyingadditional Hub/Switch.

Incoming Mail Indication
This product can check incoming mail for user periodically. User can power on his computer to collect and read mail until this product blinks the mail LED.

Specifications

Protocols
IP, NAT, ARP, ICMP, DHCP client/server, PPPoE, PPP, PAP, CHAP, NTP, HTTP, TFTP, POP3.

Management
Telnet through network. GUI program for Windows 95/98/ME/NT/2000/XP through network.

Local
4 ports 10/100Base-T N-way Ethernet Switching.

Internet
10/100Base-T N-way Ethernet port to external Cable/DSL Modem, or other network equipment.

LED Indicators

Power/Error		Green/Red
Local x 4	100/10	Green/Orange
Internet	100/10	Green/Orange
Have Mail		Green

Electronic Specifications
Input Power DC 5V, @2.4A

Agency and Regulatory: CE, FCC part 15 Class B, BSMI, VCCI 3

Physical Dimension: 160x105.4x27mm(LxWxH)

Weight: 218g

Operating Temperature: 0℃J to 50℃

Operating Humidity: 0-90% non-condensing

Features

* Web UI management.
* Support PPPoE.
* Support VPN(PPTP, IP sec pass thru)
* LED indicator for received E-Mail.
* Up to 8Mbps performance.
* Support AutoMDIX for both LAN/WAN port uplink.
* Internet applications such as Web browser, ICQ, FTP, Telnet, E-Mail, AoE, News, NetMeeting, Ping, mIRC, AOE, PCAnyWhere.....
* DHCP server allocates up to 253 client IP addresses.
* Static DHCP.
* Proxy DNS.
* Dynamic DNS.
* Virtual server.
* DMZ host & Multi-DMZ.
* Rich Packet Filters.
* Static routing.
* Installation wizard.
* Allow firmware upgrade through network.
* Support Windows 95/98/ME/NT/2000/XP, Unix, and Mac.
* Natural firewall keeps hackers out.
* Load/save device setting from/to a PC file
* Event lo

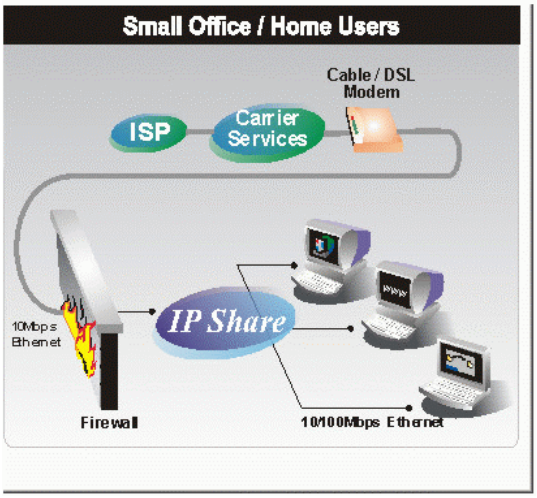

Doc No.: 121002-02

Downloaded from www.Manualslib.com manuals search engine